



L11 | High&Low Beam Auxiliary Light

**High and low beam
switchable
Eight levels of
adjustable brightness**

15,000 lumens of total luminous flux
with clear and distinct tangents.

Optional LOBOO quick detach lights mount

Quick release design, no tools required to detach and attach the auxiliary light. Quick detach lights mount + quick release waterproof connector + Lock.



▲ LOBOO quick detach lights mount



Aluminum alloy thumb-wheel switch Eight levels of brightness adjustment

The switch is installed at the clutch handle, for easy use.

Main switch + Wheel switch

Click the main switch to switch the light mode, rotate the wheel switch directly to adjust the brightness.

Status Indicator

Overtaking light switch

Click this switch to operate the overtaking lights.

Level indicator

Indicates the current brightness level.




Eight levels of brightness adjustment / from dark to bright



2500 lumens
in low beam mode

8000 lumens
in low beam mode

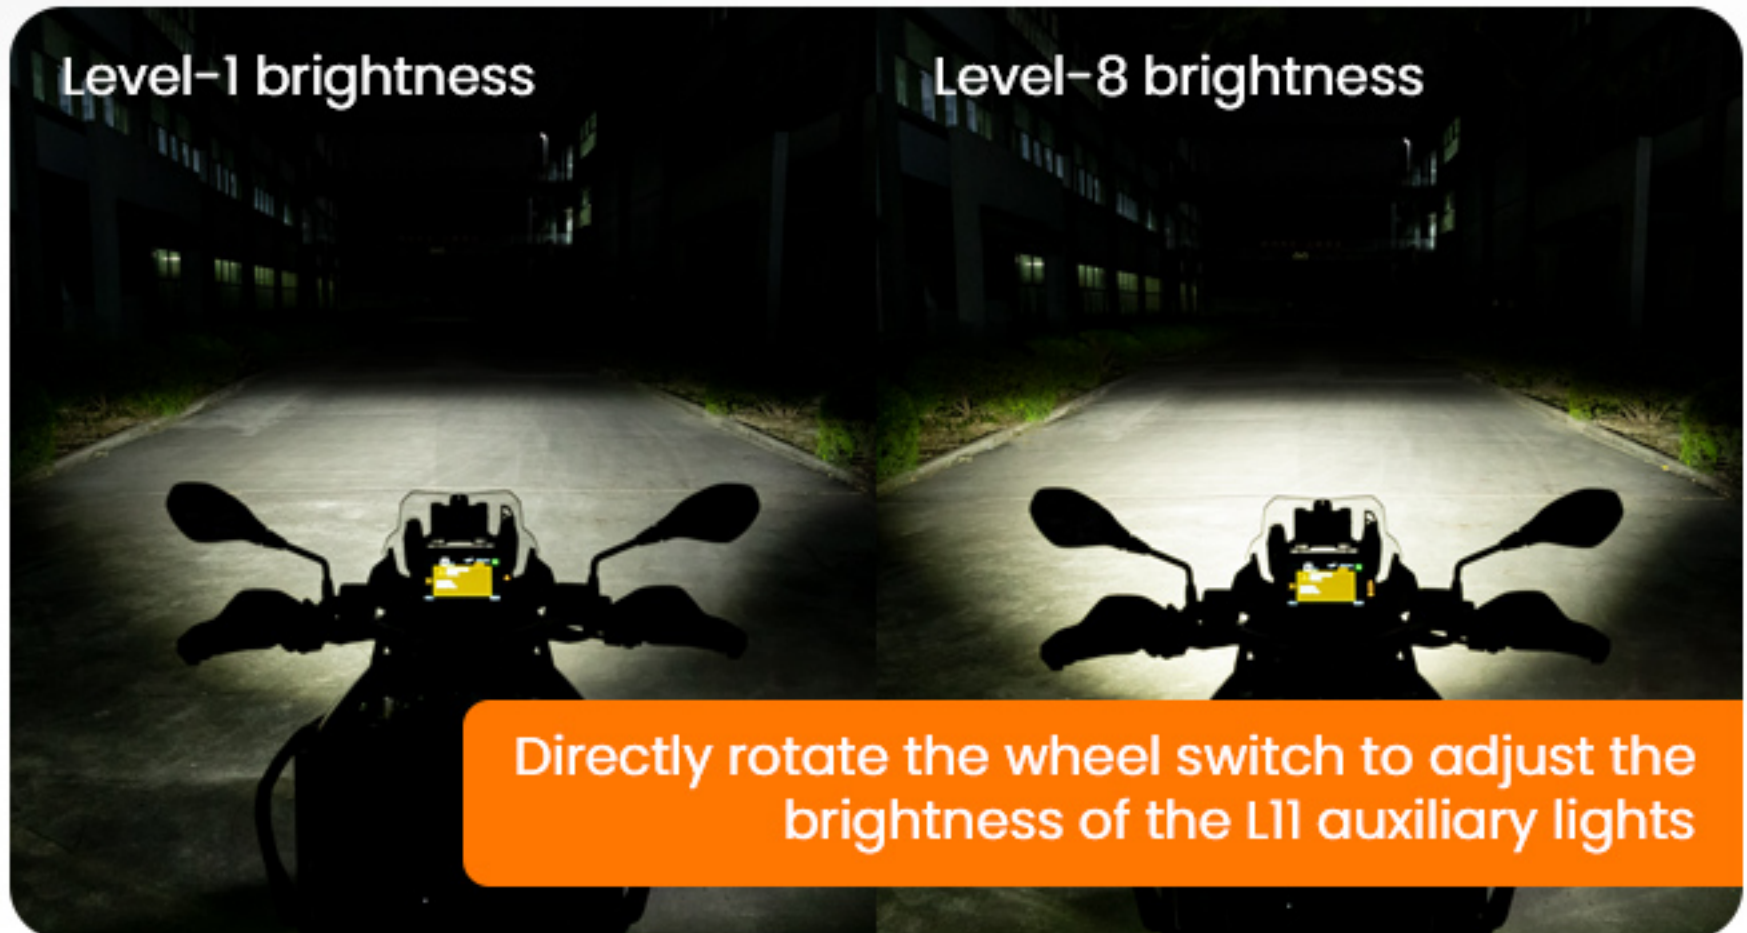


Eight levels of brightness adjustment / from dark to bright



4500 lumens
in high and low beam mode

15000 lumens
in high and low beam mode

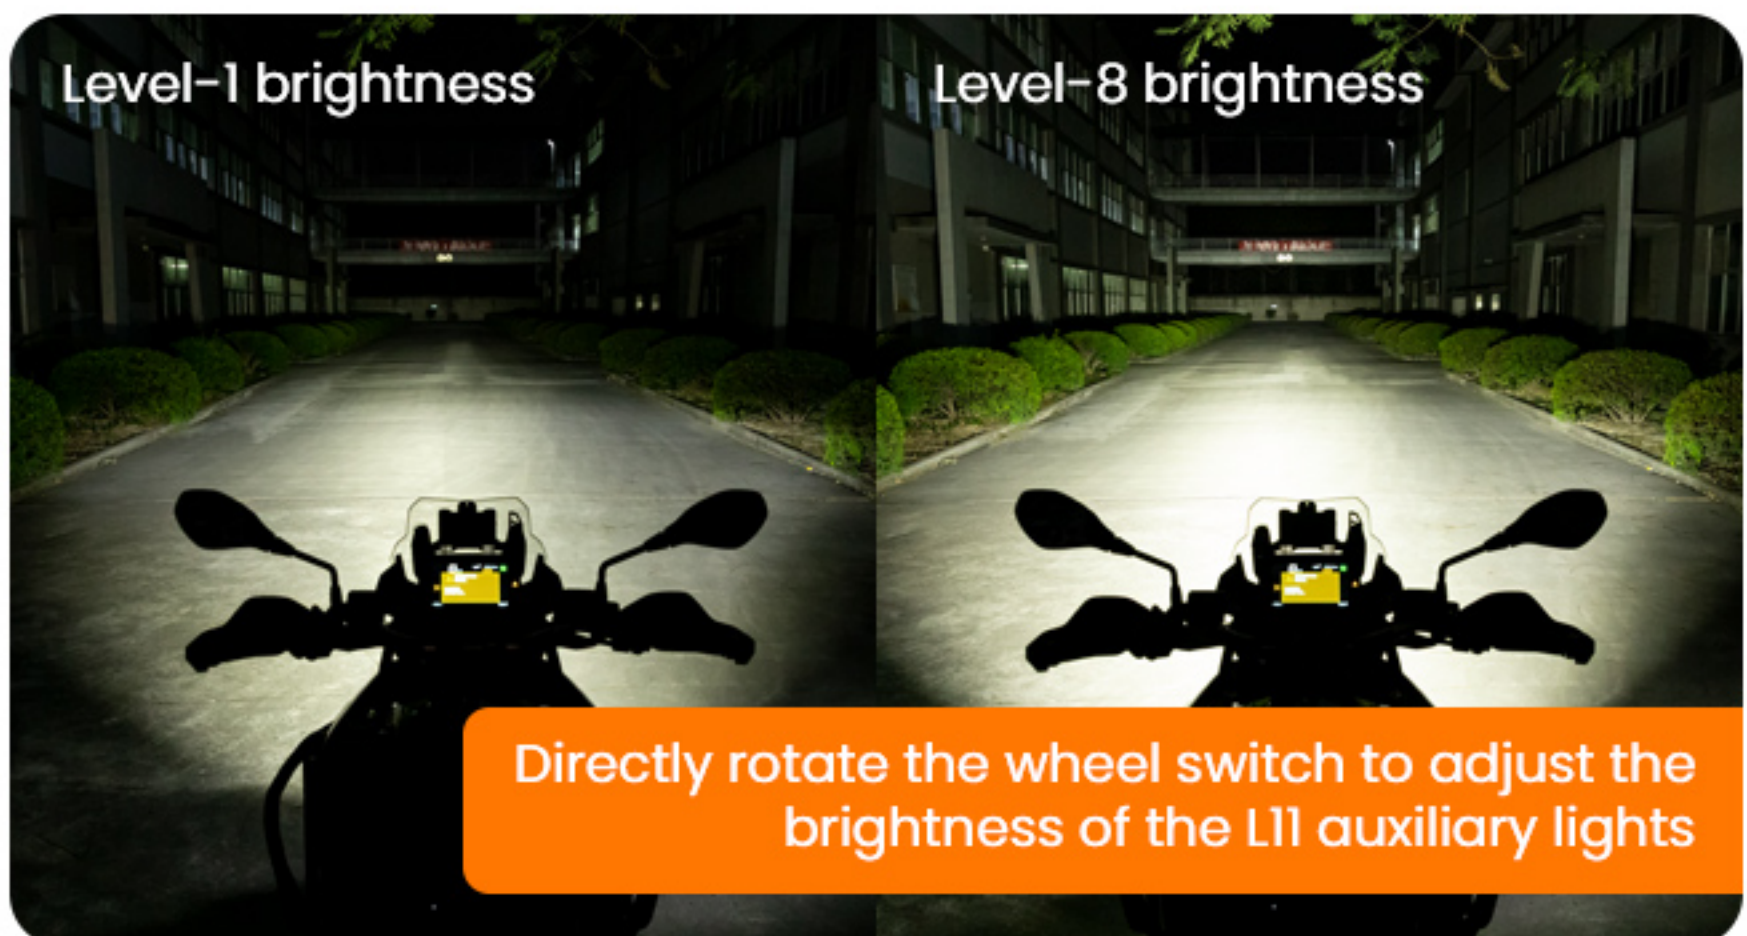

High luminous efficiency lens Excellent paving effect

High & low beams can pave an extra wide path, and the tangent line is distinct.

Tangent in low beam mode




Total luminous flux up to 15,000 lumens

The total luminous flux can reach 15,000 lumens at the highest brightness in the high&low beam modes, providing a better lighting.




High&Low Beam Auxiliary Lights L11

Unit: Lumen



Motorcycle original LED



Automobile original LED



High & low beam integrated Multiple lighting modes

Able to cycle through low beam, high and low beam and three warning light modes.

Low beam mode

While illuminating the ground it lowers the height of the light and the tangent line is clear, which can effectively protect the opposite vehicles from being interfered with.



High and low beam mode

Lighting the road while providing an extra-wide paving effect



Warning light mode

Convenient for warning signal at night



Left and right flashing separately



Left and right flashing simultaneously



Left and right flash in turn

Horn flash warning Original horn control

The driver is equipped with a flashing warning light signal cable, which can be connected to the motorcycle horn switch to sound the siren and activate the flashing warning light mode at the same time.



CNC machined aluminum alloy light body

High precision, excellent heat dissipation, sturdy and durable.



Intelligent temperature control

Automatic brightness reduction for cooling

The light body and driver can automatically downshift and cool down when the temperature is high, which can effectively avoid the damage caused by high temperature overheating, safer to use, and effectively extend the lifespan of the auxiliary lights.



Reverse connection protection



High voltage protection

LOBOO auxiliary light can be controlled by BMW motorcycle original switch

You can purchase an additional LOBOO auxiliary light CAN-BUS intelligent control module, suit for BMW motorcycle with wonder wheel.



Synchronization of high and low beams and overtaking lights



Use the wheel switch to adjust brightness



Three warning light modes



Independent control of main and second lights



Whistle and flashing light warning



Aluminum alloy body
CNC process



IP68 dustproof and waterproof



Lossless installation

CAN-BUS controller 4pin connection cable supported models

BMW R1200GS
BMW R1200GS Adventure
BMW R1200R
BMW R1200RT

BMW R1200RS
BMW R1250GS
BMW R1250GS Adventure
BMW R1250R

BMW R1250RT
BMW R1250RS
BMW F850GS

CAN-BUS controller 8pin connection cable supported models

BMW F750GS
BMW F900XR

BMW K1600 All Series

IP68 dustproof and waterproof Easy to cope with harsh environments

This product has passed lots of rigorous tests and can maintain normal performance even when riding in stormy weather.




Supports multi-angle mounting

The auxiliary lights can be rotated, and can be mounted in different angles according to different needs and mounting locations.



Various pipe diameters can be mounted

Suitable for 22mm/25mm/28mm
/32mm/38mm pipe, easy to install.

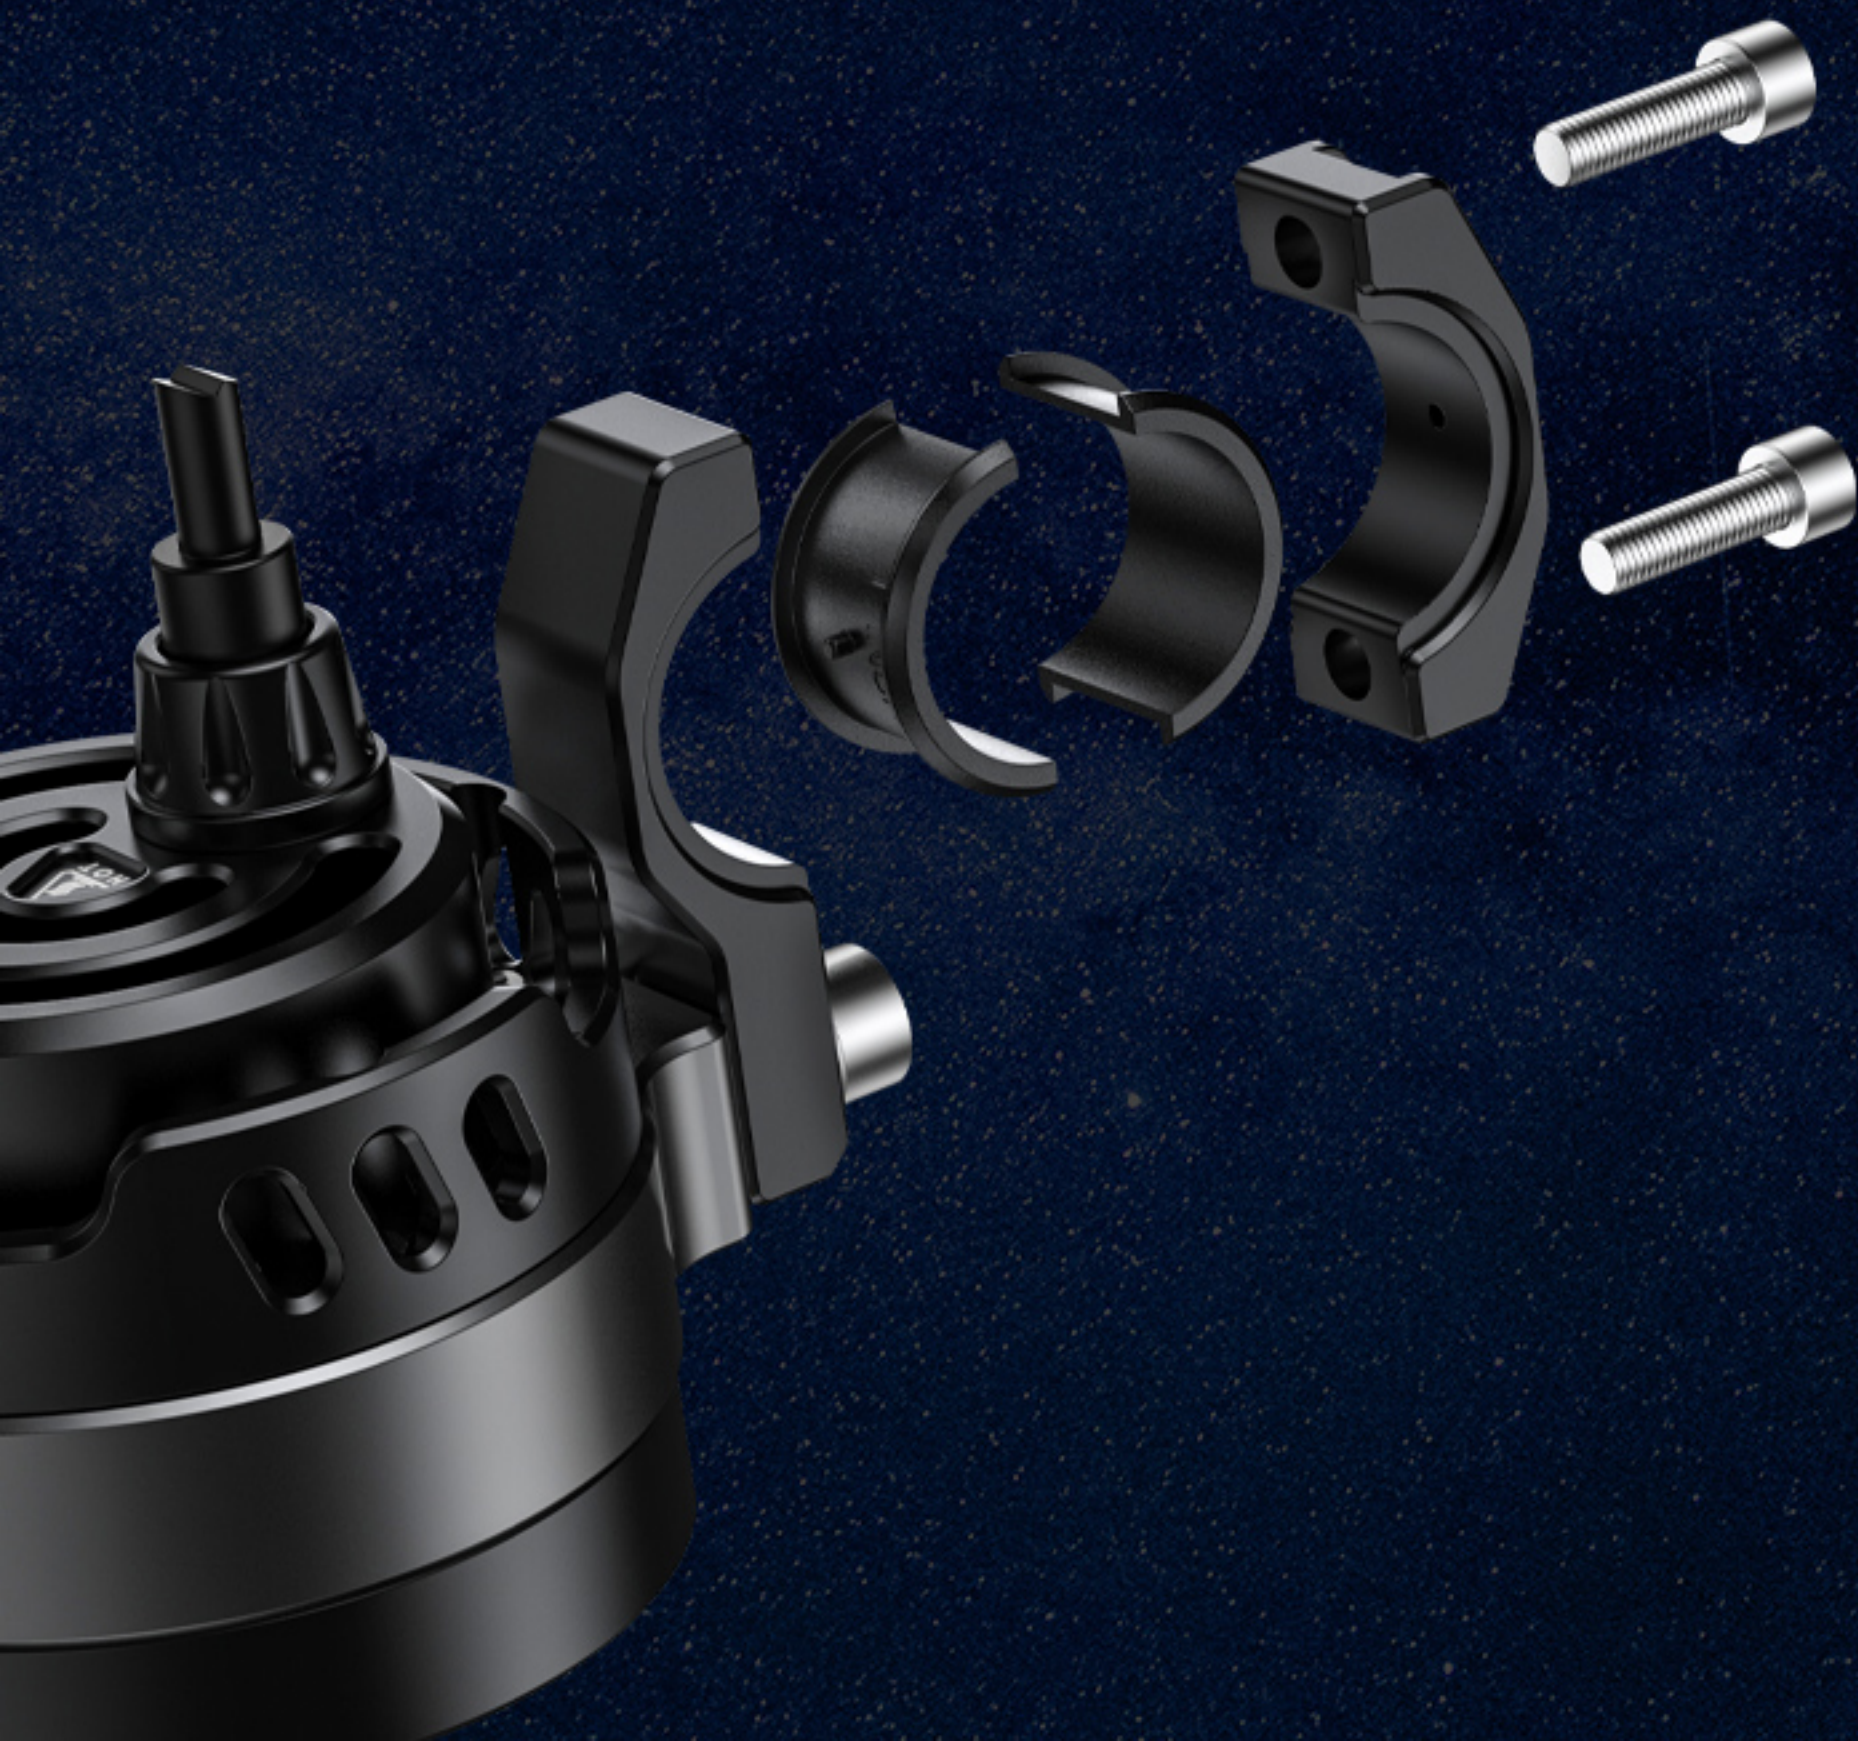

Product parameters



The above data is measured manually, the error is within reasonable limits, please prevail in kind.

Brand	LOBOO	
Product Name	High&Low Beam Auxiliary Light	
Model	L11	
Input voltage	12-15V	
Dustproof and waterproof	IP68	
Product Material	Aluminum Alloy	
Color temperature	6000K	
Low beam mode	25-80W	2500-8000 lumens
High and low beam mode	45-150W	4500-15000 lumens
Suitable for	DC 12V Fuel Motorcycle	

Installation display

